



TECHNICAL SPECIFICATIONS

CODES and COLORS				INT.	REMOV.	WHEELS	INTERNAL DIMENSIONS (mm.)					EXT. DIMENSIONS (mm.)			WEIGHT	BUOYANCY	VOLUME
BLACK	ORANGE	MIL. GREEN	DES. SAND	CONFIG.	LID		L	W	D	LID	BASE	L	W	D	Kg.	*Kg.max	Litres
1908.B E	1908.O E	1908.G E	---	empty	---	---	190	125	85	20	65	216	180	102	0,70	1,4	2,0
1908.B	1908.O	1908.G	---	w/foam	---	---	190	125	85	20	65	216	180	102	0,80	---	---
1913.B E	1913.O E	1913.G E	---	empty	---	---	190	125	135	20	115	216	180	152	0,85	2,4	3,2
1913.B	1913.O	1913.G	---	w/foam	---	---	190	125	135	20	115	216	180	152	0,92	---	---
2209.B E	2209.O E	2209.G E	---	empty	---	---	220	160	95	20	75	246	215	112	0,88	2,3	3,3
2209.B	2209.O	2209.G	---	w/foam	---	---	220	160	95	20	75	246	215	112	0,99	---	---
2214.B E	2214.O E	2214.G E	---	empty	---	---	220	160	145	20	125	246	215	162	1,16	3,9	5,1
2214.B	2214.O	2214.G	---	w/foam	---	---	220	160	145	20	125	246	215	162	1,29	---	---
2712.B E	2712.O E	2712.G E	---	empty	YES	---	276	200	120	35	85	305	270	144	1,62	4,2	6,6
2712.B	2712.O	2712.G	---	w/foam	YES	---	276	200	120	35	85	305	270	144	1,83	---	---
2717.B E	2717.O E	2717.G E	---	empty	YES	---	276	200	170	35	135	305	270	194	1,93	6,7	9,3
2717.B	2717.O	2717.G	---	w/foam	YES	---	276	200	170	35	135	305	270	194	2,12	---	---
3317.B E	3317.O E	3317.G E	---	empty	YES	---	330	234	170	68	102	360	304	194	2,29	7,0	13,1
3317.B	3317.O	3317.G	---	w/foam	YES	---	330	234	170	68	102	360	304	194	2,51	---	---
3317W.B E	---	---	---	empty	YES	---	330	350	170	68	102	360	420	194	2,92	10,6	19,6
3317W.B	---	---	---	w/foam	YES	---	330	350	170	68	102	360	402	194	3,30	---	---
3818.B E	3818.O E	3818.G E	---	empty	---	---	380	270	180	45	135	410	340	205	3,14	12,4	18,4
3818.B	3818.O	3818.G	---	w/foam	---	---	380	270	180	45	135	410	340	205	3,58	---	---
4412.B E	4412.O E	4412.G E	---	empty	YES	---	445	345	125	47	78	474	415	149	3,40	10,7	19,2
4412.B	4412.O	4412.G	---	w/foam	YES	---	445	345	125	47	78	474	415	149	3,90	---	---
4412.B C	-	4412.G C	---	laptop case	YES	---	445	345	125	47	78	474	415	149	4,20	---	---
4419.B E	4419.O E	4419.G E	---	empty	YES	---	445	345	190	47	143	474	415	214	4,00	19,7	29,2
4419.B	4419.O	4419.G	---	w/foam	YES	---	445	345	190	47	143	474	415	214	4,70	---	---
4820.B E	4820.O E	4820.G E	---	empty	---	---	480	370	205	50	155	520	435	230	4,64	24,7	35,5
4820.B	4820.O	4820.G	---	w/foam	---	---	480	370	205	50	155	520	435	230	5,40	---	---
5117.B E	5117.O E	5117.G E	---	empty	YES	---	517	277	173	50	123	546	347	197	3,80	15,8	24,7
5117.B	5117.O	5117.G	---	w/foam	YES	---	517	277	173	50	123	546	347	197	4,50	---	---
5122.B E	5122.O E	5122.G E	---	empty	YES	YES	517	277	217	50	167**	546	347	247	6,00	21,5	31,0
5122.B	5122.O	5122.G	---	w/foam	YES	YES	517	277	217	50	167**	546	347	247	7,00	---	---
5822.B E	5822.O E	5822.G E	---	empty	---	---	580	440	220	60	160	650	510	245	7,16	36,7	56,1
5822.B	5822.O	5822.G	---	w/foam	---	---	580	440	220	60	160	650	510	245	8,39	---	---
5823.B E	5823.O E	5823.G E	---	empty	---	YES	580	440	220	60	160	670	510	262	9,17	36,7	56,1
5823.B	5823.O	5823.G	---	w/foam	---	YES	580	440	220	60	160	670	510	262	10,40	---	---
5833.B E	5833.O E	5833.G E	---	empty	---	YES	580	440	330	60	270	670	510	372	10,54	62,0	84,2
5833.B	5833.O	5833.G	---	w/foam	---	YES	580	440	330	60	270	670	510	372	12,65	---	---
7630.B E	7630.O E	7630.G E	---	empty	---	YES	765	485	305	60	245	860	560	355	13,56	81,8	113,1
7630.B	7630.O	7630.G	---	w/foam	---	YES	765	485	305	60	245	860	560	355	16,39	---	---
7641.B E	7641.O E	7641.G E	---	empty	---	YES	765	485	415	60	355	860	560	460	15,02	118,5	153,9
7641.B	7641.O	7641.G	---	w/foam	---	YES	765	485	415	60	355	860	560	460	18,87	---	---
10840.B E	-	10840.G E	---	empty	YES	YES	1080	620	400	200	200	1178	718	427	19,80	120,6	260
10840.B	-	10840.G	---	w/foam	YES	YES	1080	620	400	200	200	1178	718	427	26,30	120,6	260
10840.B D1	-	10840.G D1	---	int.#1	YES	YES	1080	620	400	200	200	1178	718	427	25,00	120,6	260
10840.B D2	-	10840.G D2	---	int.#2	YES	YES	1080	620	400	200	200	1178	718	427	25,00	120,6	260
9413.B E	-	9413.G E	9413.D E	empty	---	YES	939	352	137	43	94	989	415	157	6,70	27,9	45,3
9413.B	-	9413.G	9413.D	w/foam	---	YES	939	352	137	43	94	989	415	157	7,70	---	---
11413.B E	-	11413.G E	11413.D E	empty	---	YES	1136	350	135	42	93	1189	415	159	7,80	33,3	53,7
11413.B	-	11413.G	11413.D	w/foam	---	YES	1136	350	135	42	93	1189	415	159	8,80	---	---
13513.B E	-	13513.G E	13513.D E	empty	---	YES	1350	350	135	42	93	1410	415	159	8,70	39,5	63,7
13513.B	-	13513.G	13513.D	w/foam	---	YES	1350	350	135	42	93	1410	415	159	9,95	---	---
13527.B E	-	13527.G E	13527.D E	empty	---	YES	1350	350	272	42	230	1430	415	296	11,70	97,5	128,5
13527.B	-	13527.G	13527.D	w/foam	---	YES	1350	350	272	42	230	1430	415	296	14,90	---	---

* Maximum weight capacity when contents are evenly distributed that maintains buoyancy level just below the lid closure line.

** In models 5122, 5822, 5823 and 5833 the internal dimensions given are calculated on the deepest bottom area. However, the depth is shallower in places where allowance is made for the wheel wells and the telescopic handle well.



Distributed by:



EXPLORER CASES by GT LINE s.r.l.
Via del Lavoro, 50/52 - 40056 Crespellano (Bo) - Italy
Tel. +39 051 65041 - Fax +39 051 734925
www.explorercases.com - salesinternational@gtline.com



Content is not included. The information contained in this catalogue is indicative only. GT Line reserves the right at all times to incorporate modifications in the models described. In accordance with technical or commercial requirements. Any trademarks or logo's are property of the respective owners. Copyrights: Pag. 2: ARCTIC 2004 - PH LOUISE MURRAY; Pag. 5, 8: EVEREST EXPEDITION 2007 - PH MAC CHO OVO; Pag. 6, 10, 17: GERMAN NAVY CONCEPT DIVERS UNILIF OPERATION - LEBANON 2007; Pag. 9: LISBON DIVER - RALLY 2007; Pag. 14: POLIZIA DI STATO - NUCLEO ANTITERR - VENEZIA 2010; Pag. 21: AQUATIC CONCEPT LIFE GUARD - THAILAND 2006; Pag. 22: ARCHIMIO LA VENTA - PH G. BAUDINO - NAICA CASES - MEXICO 2006; Pag. 24: LA LOIRE A COUTURE - COURANT - S. JORDEAU - 2007; Pag. 28: CERRIO TORRE - PH M. CHIEMELLO - PATA GONIA 2011.

REV. 2 DAT. GEN. EXPL. 07/11 5.000 EN



MADE IN ITALY



From the European Leader in
Technical Cases Manufacturing

www.explorercases.com





BUILT STRONGER TO LAST LONGER



Explorer Cases are the first of their kind to be manufactured in Europe, indeed their clean lines and good looks reflect their Italian heritage. We have produced a range of virtually indestructible durable waterproof cases providing a solution for any equipment requiring a high level of protection. Applications range from Military and Aerospace to Computer and Equipment cases while their dust and waterproof qualities offer absolute protection making them ideal for use in the harshest environment.

The Explorer Cases have been subjected to a series of controlled laboratory tests to prove their suitability for use in the most extreme and hazardous applications and ensure that they meet the exacting standards of: IP67 Dustproof - Waterproof; Defence Standard 81-41 Level J; STANAG 4280 (edition 2); Conformity with the Directive 2002/95/EC - MIL-STD 810F/810G (depending on models) - Nato Stock Number (NSN) available on demand.





OUR SUPERIOR FEATURES

- Made of Copolymer Polypropylene compound
- Waterproof, resistant to chemicals, humidity, dust
- Resistant to harsh temperatures (-33°C / +90°C)
- Jam-free purge valve and latches
- Recommended for professional applications
- 100% made in Italy: Italian design and proven functionality
- First to achieve the new military standard qualifications
- Recognized as the most versatile case to customize
- Widest choice of accessories to customize your experience
- Incorporate a number of patented innovations

More information on www.explorercases.com



1908		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	190	125	85	20	65
	in	7 1/2	4 15/16	3 3/8	13/16	2 9/16
External dim.	mm	216	180	102		
	in	8 1/2	7 1/16	4		
Weight empty	kg 0,70			lbs 1.54		
Weight w/foam	kg 0,80			lbs 1.76		
Volume	lt 2,0			gal 0.52		
Buoyancy	kg/max 1,4			lbs/max 3.08		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Optional shoulder strap available



Art. SHOULDERKIT.U



1913		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	190	125	135	20	115
	in	7 1/2	4 15/16	5 5/16	13/16	4 1/2
External dim.	mm	216	180	152		
	in	8 1/2	7 1/16	6		
Weight empty	kg 0,85			lbs 1.87		
Weight w/foam	kg 0,92			lbs 2.02		
Volume	lt 3,2			gal 0.79		
Buoyancy	kg/max 2,4			lbs/max 5.29		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Optional shoulder strap available




2209		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	220	160	95	20	75
	in	8 11/16	6 5/16	3 3/4	13/16	2 15/16
External dim.	mm	246	215	112		
	in	9 11/16	8 7/16	4 7/16		
Weight empty	kg 0,88			lbs 1.94		
Weight w/foam	kg 0,99			lbs 2.18		
Volume	lt 3,3			gal 0.79		
Buoyancy	kg/max 2,3			lbs/max 5.07		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Optional shoulder strap available



Art. SHOULDERKIT.U

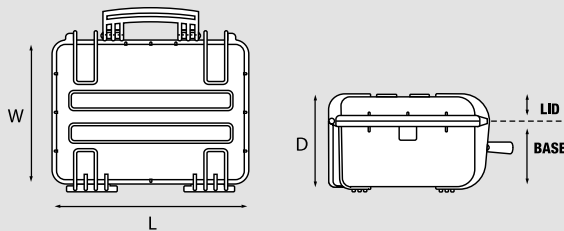



2712		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	276	200	120	35	85
	in	10 7/8	7 7/8	4 3/4	1 3/8	3 3/8
External dim.	mm	305	270	144		
	in	12	10 5/8	5 11/16		
Weight empty	kg 1,62			lbs 3.57		
Weight w/foam	kg 1,83			lbs 4.03		
Volume	lt 6,6			gal 1.58		
Buoyancy	kg/max 4,2			lbs/max 9.25		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 28 for details)



Counterbalance supports (2712 and 2717 mod.)



2214		L	W	D			
		LENGTH	WIDTH	DEPTH	LID	BASE	
Internal dim.	mm	220	160	145	20	125	
	in	8 11/16	6 5/16	5 11/16	13/16	4 15/16	
External dim.	mm	246	215	162			
	in	9 11/16	8 7/16	6 3/8			
Weight empty		kg 1,16		lbs 2.56			
Weight w/foam		kg 1,29		lbs 2.84			
Volume		lt 5,1		gal 1.32			
Buoyancy		kg/max 3,9		lbs/max 8.59			
Temp. rating		°C min -33 max +90		°F min -27.4 max +194			
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions		B	O	G	BE	OE	GE
		black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Optional shoulder strap available




Art. SHOULDERKIT.U



2717		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	276	200	170	35	135
	in	10 7/8	7 7/8	6 11/16	1 3/8	5 5/16
External dim.	mm	305	270	194		
	in	12	10 5/8	7 5/8		
Weight empty	kg 1,93			lbs 4.25		
Weight w/foam	kg 2,12			lbs 4.67		
Volume	lt 9,3			gal 2.37		
Buoyancy	kg/max 6,7			lbs/max 14.77		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 28 for details)

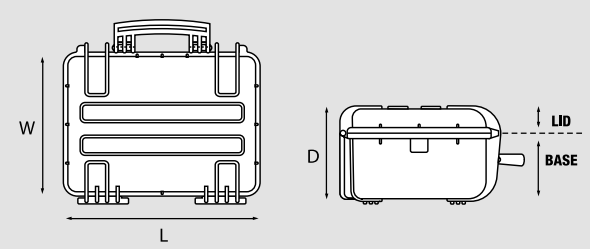



3317		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	330	234	170	68	102
	in	13	9 3/16	6 11/16	2 11/16	4
External dim.	mm	360	304	194		
	in	14 3/16	11 15/16	7 5/8		
Weight empty		kg 2,29		lbs 5.04		
Weight w/foam		kg 2,51		lbs 5.53		
Volume		lt 13,1		gal 3.43		
Buoyancy		kg/max 7,0		lbs/max 15.43		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)				
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 28 for details)

NEW



3317W		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	330	350	170	68	102
	in	13	13 3/4	6 11/16	2 11/16	4
External dim.	mm	360	420	194		
	in	14 3/16	16 9/16	7 5/8		
Weight empty		kg 2,92			lbs 6.43	
Weight w/foam		kg 3,30			lbs 7.27	
Volume		lt 19,6			gal 5.17	
Buoyancy		kg/max 10,6			lbs/max 23.36	
Temp. rating		°C min -33 max +90			°F min -27.4 max +194	
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	BE				
	black w/foam	black empty				

- Lid can be set to slide-off (see pg. 28 for details)


Counterbalance supports
(3317 e 3317W mod.)



3818		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	380	270	180	45	135
	in	14 15/16	10 5/8	7 1/16	1 3/4	5 5/16
External dim.	mm	410	340	205		
	in	16 1/8	13 3/8	8 1/16		
Weight empty		kg 3,14		lbs 6.92		
Weight w/foam		kg 3,58		lbs 7.89		
Volume		lt 18,4		gal 4.75		
Buoyancy		kg/max 12,4		lbs/max 27.33		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Soft grip rubber handle

Counterbalance supports
(3818 mod.)

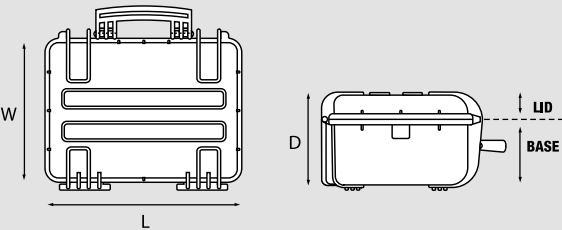



OUR FULL WARRANTY



"We want you to count on Explorer Cases as the most reliable resource to carry your valuable equipment in the harshest environments. That's why you can count FOREVER on our cases warranty against breakage of materials and defects on workmanship that could affect the integrity of what you carry inside. After all, it is not by coincidence that all of our unbreakable cases have met the most rigorous military standard qualifications and are now so popular in extreme environments, no matter what human being, animal or fish you come across in your life journey."

* Warranty valid only if the case has not been subject to abuse, misuse, negligence or accident.

See full details on www.explorercases.com



4412		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	445	345	125	47	78
	in	17 1/2	13 9/16	4 15/16	1 7/8	3 1/16
External dim.	mm	474	415	149		
	in	18 11/16	16 5/16	5 7/8		
Weight empty		kg 3,40		lbs 7.49		
Weight w/foam		kg 3,90		lbs 8.59		
Volume		lt 19,2		gal 5.01		
Buoyancy		kg/max 10,7		lbs/max 23.58		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty
	BC	GC				
	black w/pc bag	mil. green w/pc bag				

- Lid can be set to slide-off (see pg. 28 for details)
- Optional shoulder strap available
- Soft grip rubber handle



4412.B C



4419		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	445	345	190	47	143
	in	17 1/2	13 9/16	7 1/2	1 7/8	5 5/8
External dim.	mm	474	415	214		
	in	18 11/16	16 5/16	8 7/16		
Weight empty	kg 4,00			lbs 8.81		
Weight w/foam	kg 4,70			lbs 10.36		
Volume	lt 29,2			gal 7.66		
Buoyancy	kg/max 19,7			lbs/max 43.43		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 28 for details)
- Optional shoulder strap available
- Soft grip rubber handle



Counterbalance supports





4412.B C and **4412.G C** models include:

- computer bag with shoulder strap (mod. BAG-PC44)
- organized lid panel (mod. PANEXPL44)
- shoulder strap attachment metal pins kit to fix the shoulder strap also on the case (SHOULDER KIT.U)



Art. SHOULDERKIT.U





4820		L	W	D			
		LENGTH	WIDTH	DEPTH	LID	BASE	
Internal dim.	mm	480	370	205	50	155	
	in	18 7/8	14 9/16	8 1/16	1 15/16	6 1/8	
External dim.	mm	520	435	230			
	in	20 1/2	17 1/8	9 1/16			
Weight empty		kg 4,64			lbs 10.22		
Weight w/foam		kg 5,40			lbs 11.90		
Volume		lt 35,5			gal 9.24		
Buoyancy		kg/max 24,7			lbs/max 54.45		
Temp. rating		°C min -33 max +90			°F min -27.4 max +194		
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
		MIL-STD 810G					
Versions		B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty	

- Soft grip rubber handle

Splittable, padded PC and divider bag. It is the ideal solution for carrying and protecting both computer (17" size) and photographic equipment. Adjustable shoulder belt included. This optional bag perfectly fits into the 4820 model case. (Art. BAG-PC48)



Art. SHOULDERKIT.U

5117		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	517	277	173	50	123
	in	20 3/8	10 7/8	6 13/16	1 15/16	4 13/16
External dim.	mm	546	347	197		
	in	21 1/2	13 11/16	7 3/4		
Weight empty		kg 3,80			lbs 8.37	
Weight w/foam		kg 4,50			lbs 9.92	
Volume		lt 24,7			gal 6.34	
Buoyancy		kg/max 15,8			lbs/max 34.83	
Temp. rating		°C min -33 max +90			°F min -27.4 max +194	
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Lid can be set to slide-off (see pg. 28 for details)
- Optional shoulder strap available
- Soft grip rubber handle



5122		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	517	277	217	50	167
	in	20 3/8	10 7/8	8 9/16	1 15/16	6 9/16
External dim.	mm	546	347	247		
	in	21 1/2	13 11/16	9 3/4		
Weight empty	kg 6,00			lbs 13.22		
Weight w/foam	kg 7,00			lbs 15.43		
Volume	lt 31,0			gal 8.18		
Buoyancy	kg/max 21,5			lbs/max 47.39		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty


- Lid can be set to slide-off (see pg. 28 for details)
- Soft grip rubber handle



Easy to open release telescopic handle



Wheels with bearings





5823		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	220	60	160
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16
External dim.	mm	670	510	262		
	in	26 3/8	20 1/16	10 5/16		
Weight empty		kg 9,17			lbs 20.21	
Weight w/foam		kg 10,40			lbs 22.92	
Volume		lt 56,1			gal 14.79	
Buoyancy		kg/max 36,7			lbs/max 80.90	
Temp. rating		°C min -33 max +90			°F min -27.4 max +194	
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)				
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Wheels and telescopic handle
- Soft grip rubber handle

Telescopic handle with quick and safe lock/unlock system



Self-oiling free running wheels




5822		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	220	60	160
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16
External dim.	mm	650	510	245		
	in	25 9/16	20 1/16	9 5/8		
Weight empty		kg 7,16		lbs 15.78		
Weight w/foam		kg 8,39		lbs 18.49		
Volume		lt 56,1		gal 14.79		
Buoyancy		kg/max 36,7		lbs/max 80.90		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)				
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Soft grip rubber handle



5833		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	330	60	270
	in	22 13/16	17 5/16	13	2 3/8	10 5/8
External dim.	mm	670	510	372		
	in	26 3/8	20 1/16	14 5/8		
Weight empty		kg 10,54		lbs 23.23		
Weight w/foam		kg 12,65		lbs 27.88		
Volume		lt 84,2		gal 22.19		
Buoyancy		kg/max 62,0		lbs/max 136.68		
Temp. rating		°C min -33 max +90		°F min -27.4 max +194		
Certifications		IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)				
		MIL-STD 810F				
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Wheels and telescopic handle
- Soft grip rubber handle

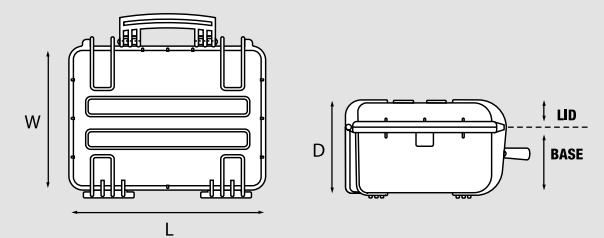



CERTIFICATIONS

- IP67 Waterproof, dustproof
- Defence Standard 81-41 Level J
- STANAG 4280 (edition 2)
- Conformity with the Directive 2002/95/EC
- MIL-STD 810F/810G (depending on models)
- Nato Stock Number (NSN) available on demand

Certificates available for download on www.explorercases.com



7630		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	765	485	305	60	245
	in	30 1/8	19 1/8	12	2 3/8	9 5/8
External dim.	mm	860	560	355		
	in	33 7/8	22 1/16	14		
Weight empty	kg	13,56		lbs	29.89	
Weight w/foam	kg	16,39		lbs	36.13	
Volume	lt	113,1		gal	29.85	
Buoyancy	kg/max	81,8		lbs/max	180.33	
Temp. rating	°C	min -33	max +90	°F	min -27.4	max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Large front handle
- Wheels and retractable handle



Two man lift side handles



Self-oiling free running wheels



Back Retractable handle



Front



7641		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	765	485	415	60	355
	in	30 1/8	19 1/8	16 5/16	2 3/8	14
External dim.	mm	860	560	460		
	in	33 7/8	22 1/16	18 1/8		
Weight empty	kg	15,02		lbs	33.11	
Weight w/foam	kg	18,87		lbs	41.60	
Volume	lt	153,9		gal	40.41	
Buoyancy	kg/max	118,5		lbs/max	261.24	
Temp. rating	°C	min -33	max +90	°F	min -27.4	max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
	MIL-STD 810F					
Versions	B	O	G	BE	OE	GE
	black w/foam	orange w/foam	mil. green w/foam	black empty	orange empty	mil. green empty

- Side handles
- Wheels and retractable handle



Two man lift side handles





Self-oiling free running wheels



Back Retractable handle



Front





THE RANGE



The Explorer Cases are available in several different sizes with four standard colours and two main standard configurations. Special colours are available on request depending on quantity.

It is possible to personalize the interiors into various configurations; the clean internal lines provide the ideal case for foam convertors and custom foam fitting and the pre cubed foam allows the user to tailor the insert to their own individual requirement. In addition the cases are moulded with location points offering the easy insertion of special supports for panel mounting, panel rings, to easily create your customized solution.



9413		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	939	352	137	43	94
	in	36 15/16	13 7/8	5 3/8	1 11/16	3 11/16
External dim.	mm	989	415	157		
	in	38 15/16	16 5/16	6 3/16		
Weight empty	kg	6,70				lbs 14.77
Weight w/foam	kg	7,70				lbs 16.97
Volume	lt	45,3				gal 11.96
Buoyancy	kg/max	27,9				lbs/max 61.50
Temp. rating	°C	min -33 max +90			°F	min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Side handles
- Large front handle
- Wheels
- Optional shoulder strap available



Digital locks on demand (case code + DL)



Two man lift side handles



Wheels with bearings



Art. SHOULDERKIT.135



Digital locks on demand (case code + DL)



Two man lift side handles




Wheels with bearings



Art. SHOULDERKIT.135

11413		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1136	350	135	42	93
	in	44 3/4	13 3/4	5 5/16	1 5/8	3 11/16
External dim.	mm	1189	415	159		
	in	46 13/16	16 5/16	6 1/4		
Weight empty	kg	7,80				lbs 17.19
Weight w/foam	kg	8,80				lbs 19.40
Volume	lt	53,7				gal 14.18
Buoyancy	kg/max	33,3				lbs/max 73.41
Temp. rating	°C	min -33 max +90			°F	min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Side handles
- Large front handle
- Wheels
- Optional shoulder strap available

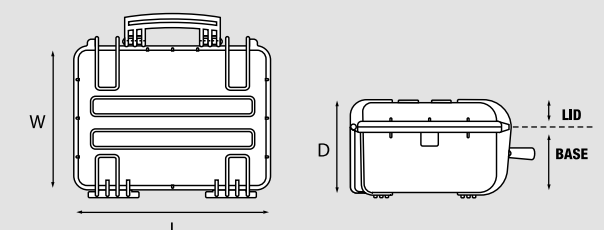



13513		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1350	350	135	42	93
	in	53 1/8	13 3/4	5 5/16	1 5/8	3 11/16
External dim.	mm	1410	415	159		
	in	55 1/2	16 5/16	6 1/4		
Weight empty	kg 8,70			lbs 19.18		
Weight w/foam	kg 9,95			lbs 21.93		
Volume	lt 63,7			gal 16.82		
Buoyancy	kg/max 39,5			lbs/max87.08		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Side handles
- Large front handle
- Wheels
- Optional shoulder strap available



Digital locks on demand (case code + DL)




Two man lift side handles



Wheels with bearings



Art. SHOULDERKIT.135

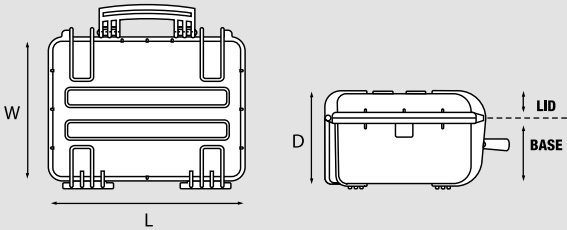

13527		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1350	350	272	42	230
	in	53 1/8	13 3/4	10 11/16	1 5/8	9 1/16
External dim.	mm	1430	415	296		
	in	56 5/16	16 5/16	11 5/8		
Weight empty	kg 11,70			lbs 25.79		
Weight w/foam	kg 14,90			lbs 32.84		
Volume	lt 128,5			gal 33.94		
Buoyancy	kg/max 97,5			lbs/max 214.95		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	D	BE	GE	DE
	black w/foam	mil. green w/foam	des. sand w/foam	black empty	mil. green empty	des. sand empty

- Side handles
- Large front handle
- Wheels




Digital locks on demand (case code + DL)



Two man lift side handles



6 wheels with bearings

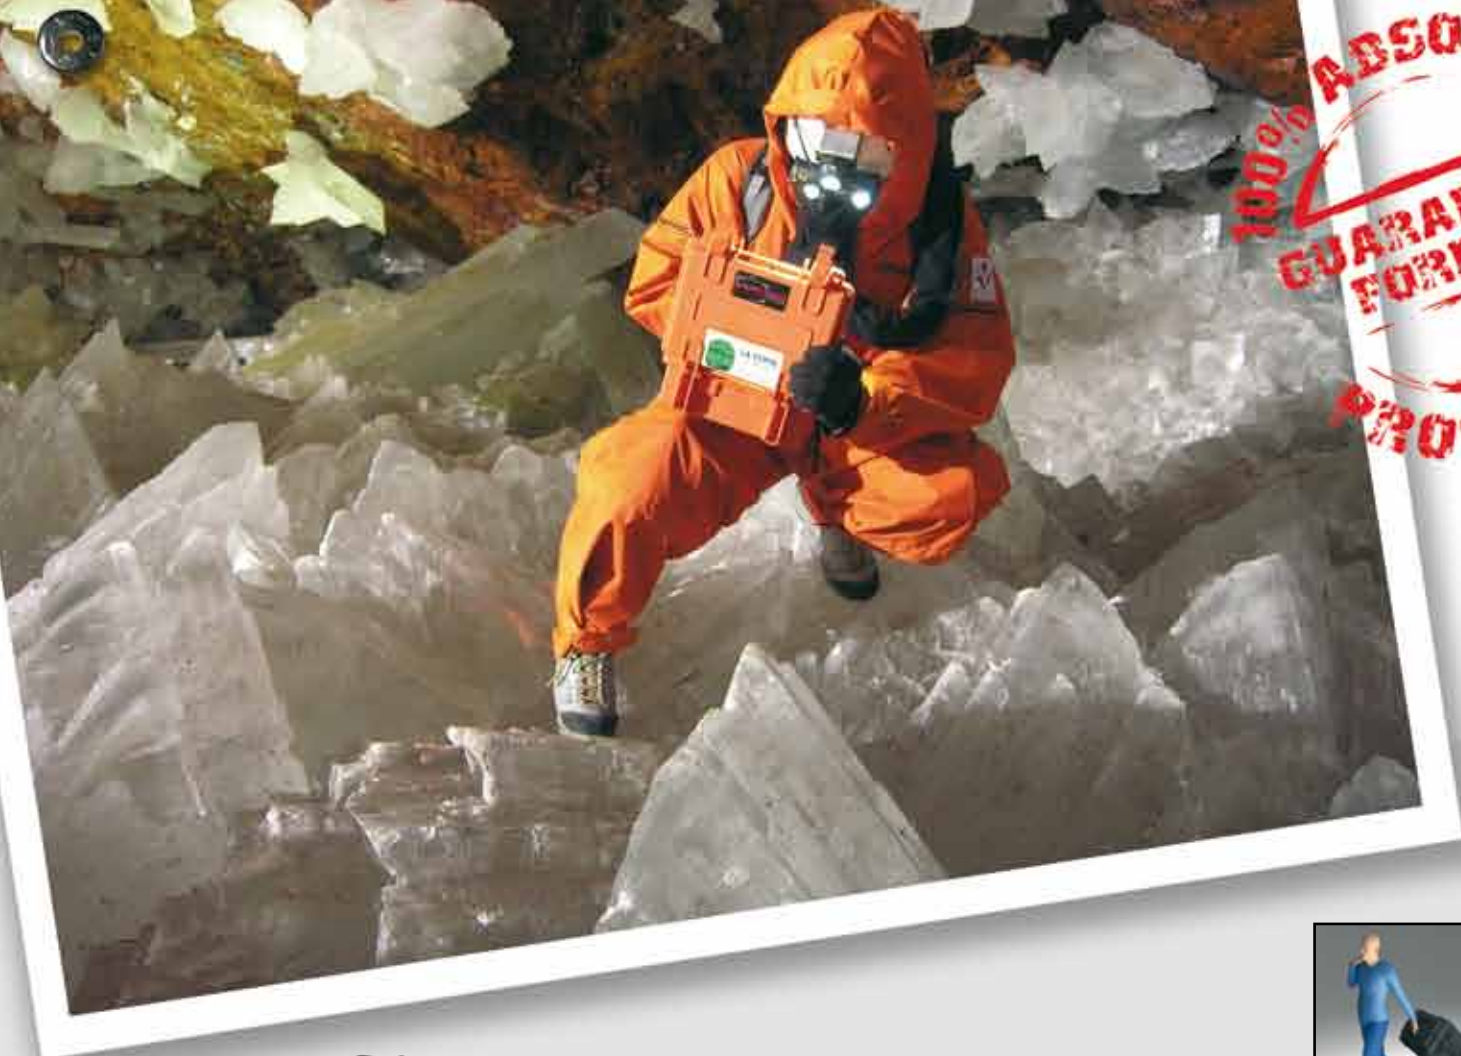

MULTI-WEAPONS CONFIGURATIONS

Models: 10840.B D1 - 10840.G D1 - 10840.B D2 - 10840.G D2

All cases mentioned above are set with internal pre-shaped foam bedding and metal lock bars for the 6+6 most used weapons, such as: G36, MP5, M4, M16, AR 70/90 guns models. (All mentioned trademarks and brands are the property of their respective owners).

OTHER WEAPONS RACKING SYSTEM CONFIGURATIONS ARE AVAILABLE



Digital locks on demand (case code + DL)

It has a color-change replaceable card which turns from blue to lavender to pink as the humidity increases. (Art. ASP.0010)



HUMIDITY INDICATOR (10840.B D1 and 10840.G D1 mod.)



4 self-oiling free running wheels

- Detachable lid for easier access
- Four self-oiling free running heavy duty wheels
- Folding side handles on both shells
- Two man lift large folding side handles

10840		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1080	620	400	200	200
	in	42 1/2	24 7/16	15 3/4	7 7/8	7 7/8
External dim.	mm	1178	718	427		
	in	46 3/8	28 1/4	16 13/16		
Weight empty	kg	19,80			lbs	43.65
Weight w/foam	kg	26,30			lbs	57.32
Weight w/multi weapons foam	kg	25,00			lbs	55.11
Volume	lt	260			gal	68.68
Buoyancy	kg/max	120,6			lbs/max	265.87
Temp. rating	°C	min -33	max +90		°F	min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					
Versions	B	G	BE	GE	BD1	GD1
	black w/foam	mil. green w/foam	black empty	mil. green empty	black w/whum. ind. weapons foam	green w/whum. ind. weapons foam
	BD2	GD2				
	black with multi weapons foam	mil. green w/multi weapons foam				



Metal bracket (Art. EX.METALPLATE 2 pcs) to secure the whole case or the single shell to the wall in order to create a permanent or mobile armoury. Can also be used in special vehicles configurations or deployed in the field. The case (or both open shells separately) is hanged to the metal bracket by mean of its upper external handle, therefore easy to be applied and removed. The metal bracket has been studied to be fixed with a padlock to the case handle to avoid accidental releases or thefts (padlock not included).



Art. PANDIV.10840 Optional.
To hold the lid foam content steady in place.
The kit includes:
- 1 alveolar polypropylene sheet
- 4 velcro straps
- 8 metal loops and fixing hardware



MULTI-FUNCTION PADDED BAGS and ORGANIZED POUCHES

A complete set of removable padded bags with handles, internal adjustable dividers and lid panels with pouches available on demand in most of the models. They protect and transport any kind of sensitive equipment and thanks to their modularity, they can be easily combined.



BAG-R
Ext. Dim. (AxBxC) 270x195x80 mm.



BAG-S
Ext. Dim. (AxBxC) 270x195x130 mm.



BAG-T
Ext. Dim. (AxBxC) 325x230x95 mm.



BAG-E
Ext. Dim. (AxBxC) 375x265x140 mm.



BAG-PC44
Ext. Dim. (AxBxC) 450x345x55 mm.



BAG-A
Ext. Dim. (AxBxC) 450x350x125 mm.



BAG-F
Ext. Dim. (AxBxC) 475x365x160 mm.



BAG-PC48
Ext. Dim. (AxBxC) 475x365x170 mm.



BAG-B
Ext. Dim. (AxBxC) 530x285x135 mm.



BAG-G
Ext. Dim. (AxBxC) 435x285x165 mm.



DIV-H
Ext. Dim. (AxBxC) 435x285x270 mm.



DIV-I
Ext. Dim. (AxBxC) 435x285x110 mm.



BAG-L
Ext. Dim. (AxBxC) 380x240x240 mm.



BAG-M
Ext. Dim. (AxBxC) 755x240x245 mm.



DIV-N
Ext. Dim. (AxBxC) 485x382x240 mm.



BAG-O
Ext. Dim. (AxBxC) 382x242x355 mm.



BAG-P
Ext. Dim. (AxBxC) 755x240x350 mm.



DIV-Q
Ext. Dim. (AxBxC) 485x382x350 mm.



PANEXPL27
Dim. 255x180 mm.



PANEXPL33
Dim. 310x215 mm.



PANEXPL38
Dim. 375x225 mm.



PANEXPL44
Dim. 425x305 mm.



PANEXPL48
Dim. 475x325 mm.



PANEXPL51
Dim. 500x230 mm.




PANEXPL58
Dim. 575x395 mm.



PANEXPL76
Dim. 755x440 mm.

CASE	PANELS	BAGS AND DIVIDERS			
2712	PANEXPL27	R			
2717	PANEXPL27	S			
3317	PANEXPL33	T			
3818	PANEXPL38	E			
4412	PANEXPL44	PC44			
4419	PANEXPL44	A			
4820	PANEXPL48	F	PC48		
5117	PANEXPL51	B			
5122	PANEXPL51	B			
5822	PANEXPL58	G	G		
5823	PANEXPL58	G	G		
5833	PANEXPL58	G I	G I	H H	G H
7630	PANEXPL76	L L	L L	M M	N N
7641	PANEXPL76	O O	O O	P P	Q Q





100% ABSOLUTE
GUARANTEED
FOREVER
PROTECTION

MAIN FEATURES



POSITIVE STACKING
LOCATION



JAM FREE LATCHES WITH
EASY-OPENING MECHANISM
(from model 3818 on)

ADDITIONAL FIXING POINTS
ON THE LID AVAILABLE ON
CERTAIN MODELS


SEALING O-RING

EXCLUSIVE PP BASED
INJECTION MOLDED BODY
GRANTS SUPERIOR
RESISTANCE

CORROSION PROOF METAL
HINGES WITH LID STAY
FEATURE

ALL CASES ARE PROVIDED
WITH INTERNAL SLOTS FOR
OPTIONAL PANEL MOUNTING
BRACKETS OR PANEL
MOUNTING RINGS

BY RELEASING THE SCREW
LID BECOMES SET TO SLIDE
OFF WHEN OPENED AT 70°
(available on 2712, 2717,
3317, 4412, 4419, 5117, 5122
models)



THICKER STRUCTURAL FOAM
POLYPROPYLENE WALLS
GUARANTEE SUPERIOR
PERFORMANCE IN EXTREME
ENVIRONMENTS

REINFORCED CORNERS

PVC WATERPROOF I.D.
REMOVABLE LABEL
(Art. LABELCOVER + item nr.)

LOAD TESTED HANDLES
REINFORCED WITH CORROSION
PROOF STEEL PINS



STANDARD MODELS AVAILABLE
EMPTY OR WITH LAYERS
OF PRECUBED FOAM IN THE
BOTTOM AND CONVOLUTED
FOAM IN THE LID. CUSTOM
FOAMS AVAILABLE ON DEMAND



LAYERS OF PRECUBED FOAM
FOR THE BOTTOM AND THE LID
(Art. FOAM. + item nr.)

CONVOLUTED FOAM ONLY
FOR THE LID - includes 2 pcs.
(Art. LIDFOAM. + item nr.)

MANUAL PRESSURE RELEASE
VALVE. THE INTERNAL STOP
RING PREVENTS VALVE
FROM BEING COMPLETELY
EXTRACTED
(Art. PURGEVALVE.B)




WATERTIGHT INTERSTACKABLE HIGH THICKNESS BODY MATERIAL CORROSIONPROOF TEMP RATING -33°C/+90°C SAND & DUST PROOF SHOCKPROOF CRUSHPROOF DESIGNED FOR MILITARY USE AIRTIGHT STAINLESS TREATED METAL PARTS PADLOCKABLE GUARANTEED FOREVER



MUB78		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	780	410	330	50	280
	in	30 11/16	16 1/8	13	1 15/16	11
External dim.	mm	807	470	345		
	in	31 3/4	18 1/2	13 9/16		
Weight empty	kg 6,30			lbs 13.88		
Volume	lt 89			gal 23.51		
Buoyancy	kg/max 80,5			lbs/max 177.47		
Certifications	STANAG 4280 (ed. 2) - DEF STAN 81-41 Part 3 - Issue 4					
Versions	MUB78					
	black empty					

- Moulded High Impact Polypropylene
 - Moulded integral lifting points on both ends
 - Full length steel hinge pin to lid
 - Positive grab over latching catches
 - Trolley case integral wheels and hinge out pull handle
- Use in high/low temp environments
 - Slide out clear ID Nameplate holder
 - Large fold flat carry handle
 - Padlocking provision
 - Stacking location points
 - Lightweight

Art. KIT TRAY MUB - Optional - Tray with removable divider for tools, instruments or spare parts. MUB78 can fit up to two trays.
Elasticated bands for the tray also available (Art. KIT03).

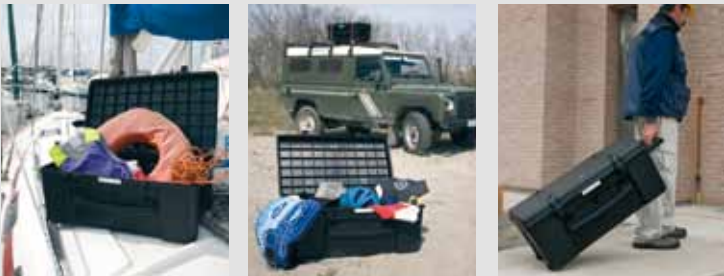

100% ABSOLUTE
GUARANTEED
FOREVER
PROTECTION



OEM SOLUTIONS

Explorer Cases are a genuine Made in Italy product of GT Line, european leading company in the manufacturing of technical cases for industrial and commercial applications. Our flexible manufacturing process allows us to easily and efficiently make your OEM case in any special colour and to personalize and develop specific interiors to meet your requirements.



GUNCASE		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	420	925	120	60	60
	in	16 9/16	36 7/16	4 3/4	2 3/8	2 3/8
External dim.	mm	475	1078	157		
	in	18 11/16	42 7/16	6 3/16		
Weight empty		kg 7,1		lbs 15.65		
Weight w/foam		kg 8,1		lbs 17.85		
Volume		lt 46,6		gal 12.31		
Versions	GUNCASE.B	GUNCASE.BE				
	black with convoluted foam	black empty				

- Four easy action quick release “up&over” catches
- Two combination locks
- Manual pressure release valve



Free running wheels



OUR AIM IS ALWAYS TO GRANT MAXIMUM PROTECTION TO THE CONTENT, OPTIMIZING INNER SPACES AND NEVER IGNORING HANDINESS. CUSTOMIZED INTERNAL CUTTING FOAMS ALLOW A WIDE RANGE OF FLEXIBLE SOLUTIONS IN ORDER TO FULFILL ANY KIND OF NEEDS.



HANDY BACKPACK CARRYING SYSTEM MADE FROM ROBUST TEAR-RESISTANT FABRIC AND DESIGNED WITH COMFORTABLE PADDED SHOULDER STRAPS THAT LEAVE YOUR HANDS FREE. AVAILABLE IN TWO ADJUSTABLE SIZES THAT FIT FROM 3317 TO 4820 MODELS. (Art. BACKPACK M - BACKPACK L)